

AQUATECHNIX



THE POOL MACHINE



AQUA MINI

Small, robust and dirt resistant. Ideal to start off with.

Pump performance	Aqua Mini 4	Aqua Mini 6
Pool size [m³]	20	30
Flow rate [m³/h]	4	6
Discharge head [mWS]	5	5
Inlet/outlet [RP]	32/32	38/38
Recommended inlet/outlet pipe, PVC pipe, d	1¼/1¼	1½/1½
Motor data		
Motor speed [rpm]	2840	2840
Power input P ₁ [kW] 1~	0.33	0.39
Power output P ₂ [kW] 1~	0.16	0.20
Motor voltage [V]	230	230
Frequency [Hz]	50	50
Rated current [A] 1~	1.50	1.95
Integrated overload switch	Yes	Yes
Type of motor enclosure	IP X4	IP X4
Sound level [dB(A)]	53.5	53.1
Article no. 1~	219.1050.038	219.1070.038

Scan the QR code for more detailed product infos



- Open impeller
- Robust motor
- Easy connection
- Dirt resistant






AQUA SPLASH

Service-friendly and efficient. Ideal to start off with.

Pump performance	Aqua Splash 4	Aqua Splash 6
Pool size [m³]	20	30
Flow rate [m³/h]	4	6
Discharge head [mWS]	6	6
Inlet/outlet [RP]	32/32	38/38
Recommended inlet/outlet pipe, PVC pipe, d	1¼/1¼	1½/1½
Motor data		
Motor speed [rpm]	2840	2840
Power input P ₁ [kW] 1~	0.39	0.45
Power output P ₂ [kW] 1~	0.18	0.25
Motor voltage [V]	230	230
Frequency [Hz]	50	50
Rated current [A] 1~	1.95	2.30
Integrated overload switch	Yes	Yes
Type of motor enclosure	IP 55	IP 55
Sound level [dB(A)]	55.7	56.3
Article no. 1~	219.1052.038	219.1072.038

Scan the QR code for more detailed product infos



- Integrated dirt trap
- Vision panel
- Simple set-up






AQUA PLUS

Self-priming with flexible screws. For every project.

Pump performance	Aqua Plus 4	Aqua Plus 6	Aqua Plus 8	Aqua Plus 11
Pool size [m³]	20	30	40	50
Flow rate [m³/h]	4	6	8	11
Discharge head [mWS]	8	8	9	9
Inlet/outlet [RP]	50/50	50/50	50/50	50/50
Recommended inlet/outlet pipe, PVC pipe, d	50/40	50/40	50/50	50/50
Motor data				
Motor speed [rpm]	2840	2840	2840	2840
Power input P ₁ [kW] 1~	0.35	0.45	0.60	0.69
Power output P ₂ [kW] 1~	0.18	0.25	0.40	0.45
Motor voltage [V]	230	230	230	230
Frequency [Hz]	50	50	50	50
Rated current [A] 1~	1.95	2.30	2.70	3.20
Integrated overload switch	Yes	Yes	Yes	Yes
Type of motor enclosure	IP X4	IP X4	IP X4	IP X4
Sound level [dB(A)]	53.9	59.2	59.4	59.8
Article no. 1~	207.2040.038	207.2060.0338	207.2080.038	207.2110.038

Scan the QR code for more detailed product infos



- Bestseller
- Variable connections
- Flexible installation




AQUA MAXI

With a large strainer tank for aboveground pools and ponds.

Pump performance	Aqua Maxi 5	Aqua Maxi 10	Aqua Maxi 16	Aqua Maxi 22
Pool size [m³]	25	50	80	110
Flow rate [m³/h]	5	10	16	22
Discharge head [mWS]	8	8	8	8
Inlet/outlet [RP]	63/50	63/50	63/50	63/50
Recommended inlet/outlet pipe, PVC pipe, d	50/50	50/50	63/50	63/50
Motor data				
Motor speed [rpm]	2840	2840	2840	2840
Power input P ₁ [kW] 1~	0.58	0.69	0.97	1.20
Power output P ₂ [kW] 1~	0-30	0.45	0.65	0.80
Motor voltage [V]	230	230	230	230
Frequency [Hz]	50	50	50	50
Rated current [A] 1~	2.60	6.20	4.70	5.30
Integrated overload switch	Yes	Yes	Yes	Yes
Type of motor enclosure	IP X4	IP X4	IP X4	IP X4
Sound level [dB(A)]	58.8	60.4	63.3	63.8
Article no. 1~	207.1050.038	207.1100.038	207.1160.038	207.2200.038

Scan the QR code for more detailed product infos



- Large dirt trap
- Robust motor
- Variable connection






AQUA MASTER

The pro machine for the greater tasks.

Pump performance	Aqua Master 10	Aqua Master 14	Aqua Master 17	Aqua Master 20
Pool size [m³]	50	70	85	100
Flow rate [m³/h]	10	14	17	20
Discharge head [mWS]	7	6	6	6
Inlet/outlet [RP]	50/50	63/50	63/63	63/63
Recommended inlet/outlet pipe, PVC pipe, d	50/50	63/50	63/63	63/63
Motor data				
Motor speed [rpm]	2840	2840	2840	2840
Power input P ₁ [kW] 1~	0.58/0.58	0.69/0.66	0.97/0.90	1.20/1.00
Power output P ₂ [kW] 1~	0.30/0.30	0.45/0.45	0.65/0.65	0.80/0.80
Motor voltage [V]	230 / 400/230	230 / 400/230	230 / 400/230	230 / 400/230
Frequency [Hz]	50	50	50	50
Rated current [A] 1~	2.60 / 1.00/1.75	3.20 / 1.25/2.15	4.70 / 1.75/3.00	5.30 / 2.10/3.60
Integrated overload switch	Yes, only 1~	Yes, only 1~	Yes, only 1~	Yes, only 1~
Type of motor enclosure	IP 55	IP 55	IP 55	IP 55
Sound level [dB(A)]	55.9	58.0	62.0	65.7
Article no. 1~	207.5100.038	207.5140.038	207.5170.038	207.5200.038
Article no. 3~	207.5100.037	207.5140.037	207.5170.037	207.5200.037

Special terms and conditions apply in France. Please contact us for further details.

Scan the QR code for detailed product infos

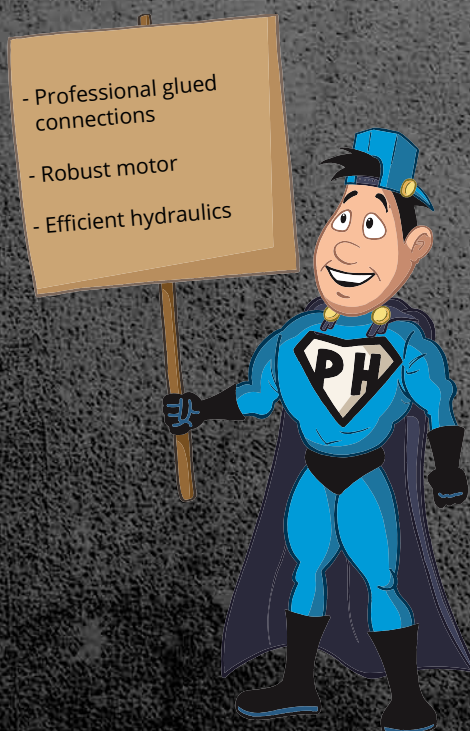




AQUA MASTER

The profi machine for the greater tasks.

Pump performance	Aqua Master 26	Aqua Master 32	Aqua Master 38	Aqua Master 48
Pool size [m³]	130	160	190	240
Flow rate [m³/h]	26	32	38	48
Discharge head [mWS]	6	5	6	6
Inlet/outlet [RP]	63/63	63/63	63/63	75/75
Recommended inlet/outlet pipe, PVC pipe, d	63/63	63/63	63/63	75/75
Motor data				
Motor speed [rpm]	2840	2840	2840	2840
Power input P ₁ [kW] 1~	1.45/1.32	1.70/1.65	2.20/2.20	2.90/2.62
Power output P ₂ [kW] 1~	1.00/1.00	1.30/1.30	1.80/1.80	2.20/2.20
Motor voltage [V]	230 / 400/230	230 / 400/230	230 / 400/230	230 / 400/230
Frequency [Hz]	50	50	50	5
Rated current [A] 1~	6.40 / 2.50/4.30	7.40 / 3.00/5.20	10.0 / 3.70/6.40	12.6 / 4.40/7.70
Integrated overload switch	Yes, only 1~	Yes, only 1~	Yes, only 1~	Yes, only 1~
Type of motor enclosure	IP 55	IP 55	IP 55	IP 55
Sound level [dB(A)]	65.5	65.8	70.2	71.9
Article no. 1~	207.5260.038	207.5320.038	207.5380.038	207.5480.038
Article no. 3~	207.5260.037	207.5320.037	207.5380.037	207.5480.037

Special terms and conditions apply in France. Please contact us for further details.

Scan the QR code for
detailed product infos





AQUA VARIO PLUS

With energy and cost-saving motor technology.

Pump performance	Aqua Vario Plus
Pool size [m³]	70
Flow rate [m³/h]	14
Discharge head [mWS]	12
Inlet/outlet [RP]	50/50
Recommended inlet/outlet pipe, PVC pipe, d	50/40
Motor data	
Motor speed [rpm]	1000 - 2840
Power input P_1 [kW] 1~	0.07 - 0.65
Power output P_2 [kW] 1~	0.03 - 0.45
Motor voltage [V]	230
Frequency [Hz]	50
Rated current [A] 1~	0.6 - 3
Integrated overload switch	Yes
Type of motor enclosure	IP 55
Sound level [dB(A)]	51 - 72
Features	
Integrated variable speed adjustment	Yes
Article no. 1~	207.2000.038

Scan the QR code for detailed product infos



- Efficient technology
- Affordable operation
- Environmentally friendly





FILTER UNITS AQ 280 - 500

The perfect sand filter units for optimum cleaning.

Technical data	Filter unit AQ 280	Filter unit AQ 330	Filter unit AQ 400	Filter unit AQ 500
Filter size [mm]	Ø 280	Ø 330	Ø 400	Ø 500
Connections [mm]	38	38	38	50
Filter surface [m²]	0.06	0.08	0.12	0.20
Flow rate at V=40 m/h	2.4	3.2	4.8	8.0
Sand [Kg]	12	21	40	75
Weight without pump	4.8	5.5	7.0	9.5
Pump combo	Aqua Mini 4 Aqua Mini 6 Aqua Splash 4 Aqua Splash 6 Aqua Plus 4 Aqua Plus 6	Aqua Mini 4 Aqua Mini 6 Aqua Splash 4 Aqua Splash 6 Aqua Plus 4 Aqua Plus 6	Aqua Mini 4 Aqua Mini 6 Aqua Splash 4 Aqua Splash 6 Aqua Plus 4 Aqua Plus 6 Aqua Plus 8	Aqua Plus 8 Aqua Plus 11 Aqua Vario Plus

Features

- Maximum pressure: 1.5 bar
- Sand corn: 0.4 - 0.8 mm
- Filter speed: 50 m/h
- Testing pressure: 2.5 bar
- Operating temperature: max. 40 °C
- Hose connection: 32 mm
- Made in Germany
- GS approved safety
- TÜV Rheinland certified
- CE tested

Scan the QR code for detailed product infos



- Robust base plate
- Thick-walled construction
- High-quality processing





AQUA FLOW JET

Counter swim unit for your pool.

Pump performance	Aqua Flow Jet
Flow rate [m³/h]	30
Massage pressure [bar]	max. 1.30
Power output P ₂ [kW]	1.2
Flow speed (2 m distance) [m/s]	0.80
Sound level [dB(A)]	67.8
Article no. 1~ without air regulation	230.4979.011
Article no. 1~ with air regulation	230.4979.012

Scan the QR code for
detailed product infos



- Easy installation
- Adjustable nozzles
- Professional connections

[illegible]

AQUATECHNIX



#BeAPoolHero

Our pool heroes look forward to hearing from you.

Paula & Andy
Sales & Pool Academy

paula@aquatechnix.de
andy@aquatechnix.de

Aqua TechniX GmbH
Hauptstraße 3
D - 91233 Neunkirchen a. Sand

Tel.: +49 9123 9499-50
Fax: +49 9123 9499-51

www.aquatechnix.de